



DESCRIPTION


- Durable solid brass construction
- Back-to-back rough-in compatible
- Reversible cartridge for flexible installation
- Square plaster guard for precise cuts
- Supports thin wall mounting
- Includes test cap
- Complies with CSA standards

PRESSURE

60 PSI

FLOW RATE

21.5 LPM

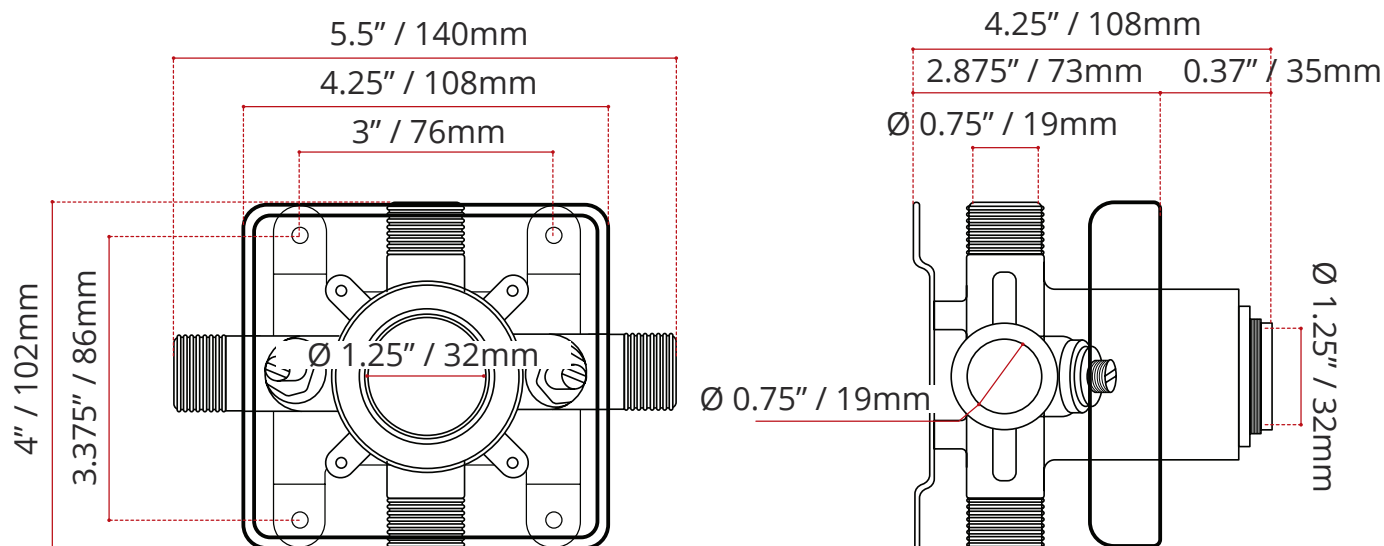

DISCLAIMER: Measurements may vary $\pm \frac{1}{4}"$ (Diagram Not to scale)