


INSTALLATION GUIDE

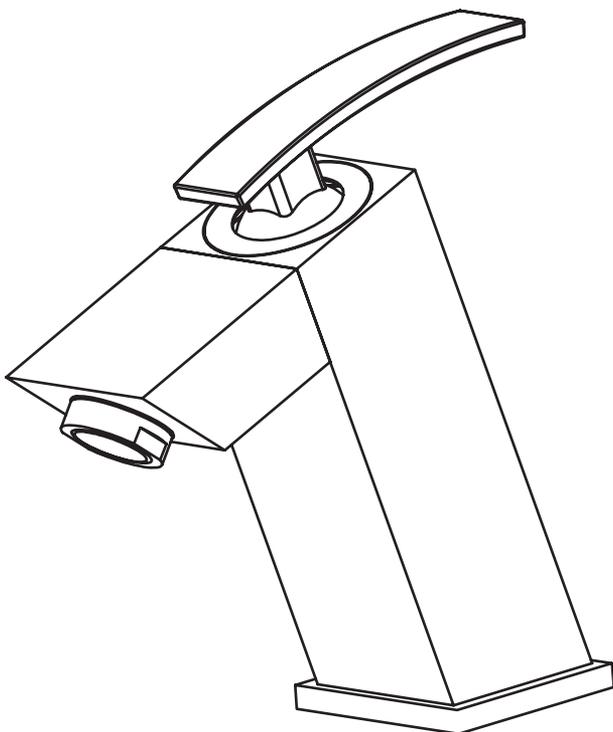

INSTALLATION GUIDE

Remove the unit from its packaging. Before disposing of packaging and taking unit from your salesperson, inspect the unit.


Should inspection reveal any damage or defects in the finish, contact your salesperson. The warranty does not cover damages or defects in the finish once the unit has been installed.

It is recommended that you place the unit in the bathroom before you start. Sectional units should be disassembled if necessary. Conserve all nuts and bolts.

Don't over bend the hose, ensure no hose deformation before or after installation.

CAUTION: FOR BEST RESULTS, WE STRONGLY RECOMMEND THE INSTALLATION OF THIS FAUCET BE DONE BY A LICENSED PLUMBER.

CARE AND MAINTENANCE



- **Avoid** polishing powder, cleaning powder and any kind of detergent.
- To clean your Valley Acrylic faucet , wash with a soapy nonabrasive cloth. Wipe dry with a soft towel or cloth. We recommend this be done on a regular basis.



VALLEY[®]

...you dream it, we create it

Congratulations! You are now a part of the Valley Acrylic family.




Before assembly, flush the water supply pipes thoroughly to drain debris inside (allow the water to run with the main stopcock open for 3min), otherwise dirty particles might affect the function of the faucet.

01




SHUT OFF WATER SUPPLIES

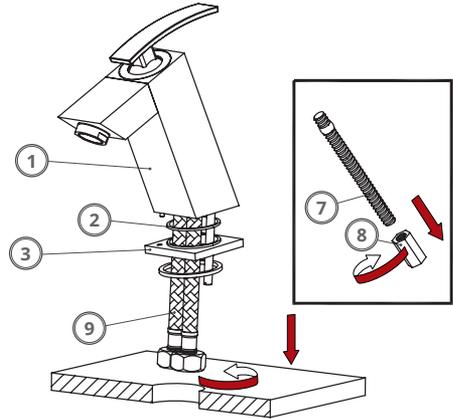

Make a hole of $\varnothing 32\sim 35\text{mm}$ on the basin deck, screw of the nut (8) from the long rod (7), screw the long rod (7) and the inlet pipe (9) onto the main body (1), put the main body into the hole with the washer (2), the base (3) and the washer (4) between basin deck and the main body.

02

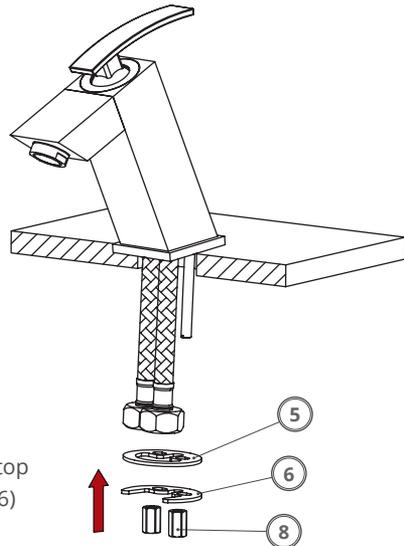


Fix the faucet from the downside countertop with the 2-hole washer (5), 2-hole gasket (6) ant the nut (8).



Before assembly, flush the water supply pipes thoroughly to drain debris inside (allow the water to run with the main stopcock open for 3min), otherwise dirty particles might affect the function of the faucet.

03

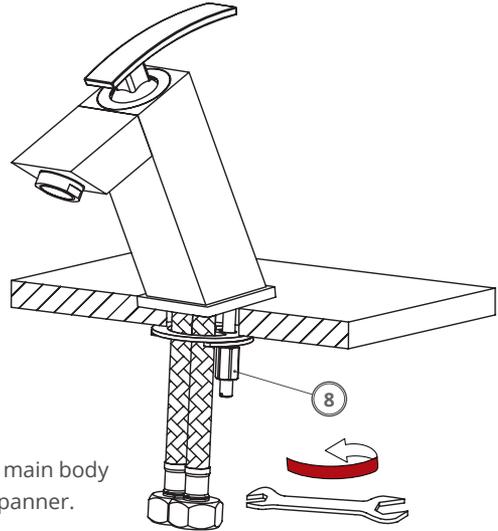

After adjusting the direction of the main body and base, tight the nut (8) with a spanner.

04

Attach the water lines to your main water supply. Ensure that you are connecting the hot and cold lines appropriately. The hot water inlet must always be connected on the left side and the cold water inlet on the right side.

