


# Installation Guide

## Undercounter Lavatory

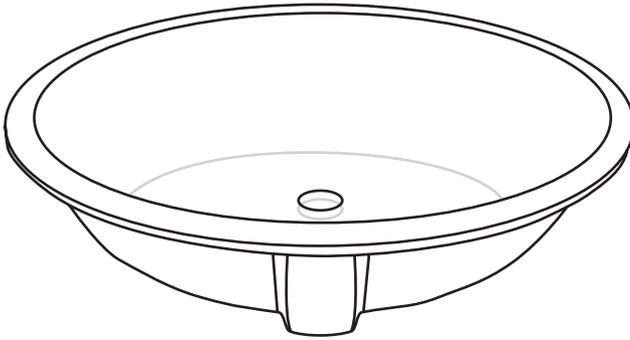


### **Thank You For Choosing Valley Acrylic**

We strive to provide the international bath market with new and innovative bathroom products manufactured to the highest standards. Located in Mission, British Columbia, Valley aims to become an industry leader setting out the highest standards in quality and design.

All the information in this guide is based upon the latest product information available at the time of publication. We reserve the right to make changes in product characteristics, packaging, or availability at any time without notice.

Please take a few minutes to review this guide. If you encounter any installation or performance problems, please call 1-877-398-tubs (8827) from within the USA and Canada.

## Tools and Materials



Tape Measure




Drill



Pencil



Safety Glasses



Scissors



Silicone Sealant



Jigsaw

Plus:

- Rags or Paper Toweling
- Template



## Before You Begin



**CAUTION:** Risk of personal injury or product damage. Handle with care. Product can break, chip or cause injury if handled carelessly. Get help lifting the lavatory.



- Observe all local plumbing and building codes.
- Prior to installation, unpack the new lavatory and inspect it for damage. Return the lavatory to its protective carton until you are ready to install it.
- Inspect the existing drain and supply tubing. Replace if necessary.
- For replacement installations, make sure the existing cutout is the same size or smaller than needed for the new lavatory.
- Do not substitute another sealant if one is supplied with this lavatory.
- Valley reserves the right to make revisions in the design of products without notice, as specified in the Price Book.

Step 1: Verify fit or relocate plumbing. If possible, pre-install the drain to the lavatory

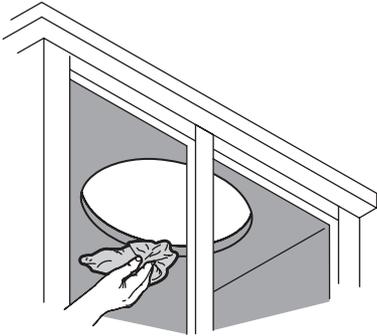



Step 2: Clean the underside of the countertop and the rim of the lavatory.

Step 3: Loosely install the clips

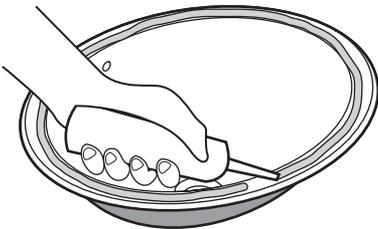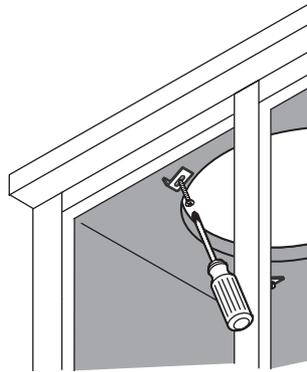



Step 4: Generously apply 100% silicone sealant. Do not use adhesives or adhesive sealants

Step 5: While lifting the lavatory, rotate and tighten clips evenly. Use anchors and fasteners provided with countertop.

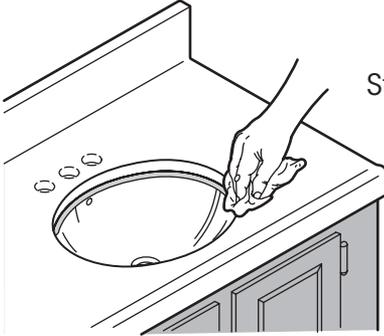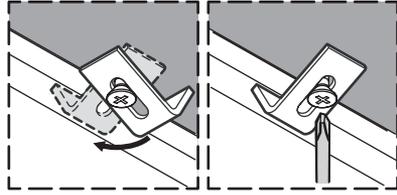

Step 6: Wipe away excess sealant

Step 7: Complete faucet installation. Connect drain.

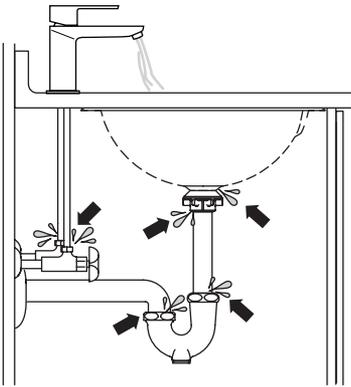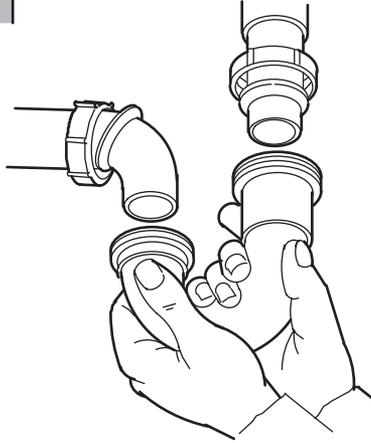

Step 8: Run Water into the lavatory and check for leaks.