

INSTALLATION GUIDE

SAFETY PRECAUTIONS

Please read the “safety precautions” carefully before use, all the precautions listed here are connected to safety. It's important and must be followed.



- Please **DO NOT** touch the electrical outlet with wet hand
- Please **DO NOT** pour water, hot water or detergent on the top of the toilet and electrical outlet
- **Never** attempt to disassemble, repair, or alter the product yourself
- Please **DO NOT** install the toilet in an RV, ship or any other moving object
- Please **DO NOT** use seawater and other water except tap water or drinkable well water

Under the following condition, please disconnect the power supply and turn off the water valve

- Water leakage from pipe or inside of the product
- crack or damage on the product
- unusual sound or smell
- Smoke
- Unusual heating
- Block
- Fall out of the cushion

Continue using the toilet by ignoring the faults may result in fire, electric shock, heat, short circuit, injury and indoor water seepage

Pay attention to the low temp scalding

- Improper use of warm seat may cause low temp scalding

If you sit for long time, please turn the temp setting to “off” level.

This is an electrical product, please do not install it in a place where is easily get wet or with high humidity.

If installed in bathroom, please also install ventilator to maintain the bathroom ventilation.

The product must be connected to the ground correctly, If not connected to the ground, it may cause an electric shock. Please always double-check if the electrical outlet is connected to the ground

The outlet for the power wire should obey the following rules.

- a. Please use a high sensibility and fast response leakage switch (rated induced currents below 15mA) or insulating transformer (1.5kVA-3kVA) to protect the outlet loop.
- b. Please reserved the installation place for the outlet and keep it away from the bathtub. Please confirm above a, and b wiring projects are finished. Or please entrust the engineering contractor to do this job.


INSTALLATION GUIDE

1

UNPLUG THE TOILET SEAT

Unplug the smart toilet seat from the electrical outlet before starting the installation.

Warning: Do not touch the plug or outlet with wet hands.

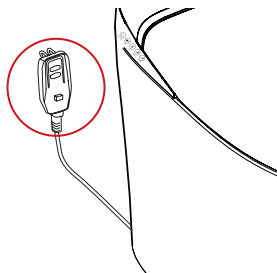


2

REMOVE THE SEAT-LID ASSEMBLY

Lift the seat-lid assembly gently from the rear interior side.


Note: Do not pull or force the cover.

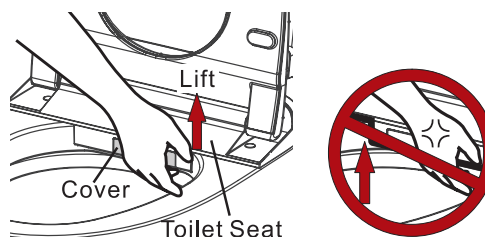

3

DISCONNECT THE HOSES


Unthread the hoses from the bottom rear of the old toilet seat.

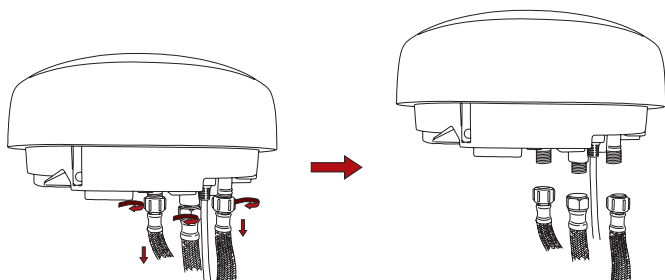

4

DISCONNECT THE SENSOR CABLE


Disconnect the sensor cable from the electrical panel cable.

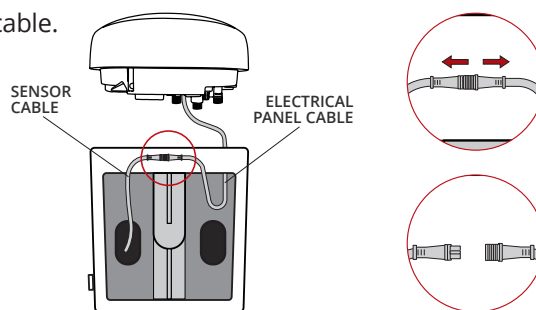

5

INSTALL THE NEW SEAT


Place the new toilet seat in position and thread the hoses into the bottom rear connections

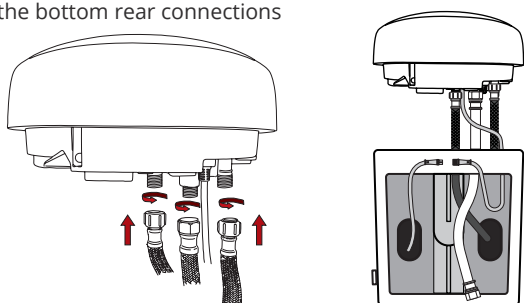

6

REINSTALL THE SEAT-LID ASSEMBLY


Lower the seat-lid assembly gently into place.

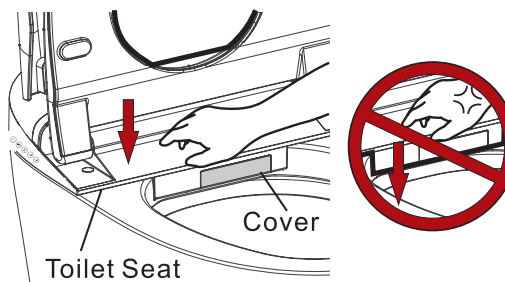

7

CONNECT THE SENSOR CABLE

Connect the sensor cable firmly to the main electrical panel cable.

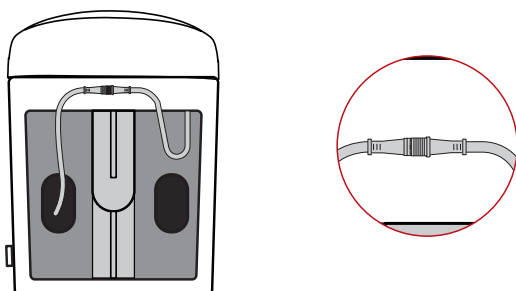

8

PLUG IN THE NEW TOILET SEAT

Plug the smart toilet seat into the electrical outlet and check for proper power and leaks.

