



# TOILET SEAT INSTALLATION MANUAL

For TB351 / TB353 Toilets

---



---

## INTRODUCTION

---

Thank you for choosing **Valley Products**. This installation manual provides general information on the installation of our products.

---

## BEFORE YOU BEGIN

---

- Read the instructions carefully before beginning the installation.
- Remove the unit from its packaging. Before disposing, packaging and taking unit from your sales person, inspect the unit to make sure it is in good shape.
- Should inspection reveal any damage or defect in the finish, Contact Us. The warranty does not cover damages or defects in the finish once the unit has been installed. Valley's responsibility for shipping damages ceases upon delivery of the product in good order to the carrier. All complaints regarding damage due to transport must be made directly to the carrier.

---

## TOOLS REQUIRED


---

- Measuring Tape.
- Screwdriver.

---

## MAINTENANCE

---

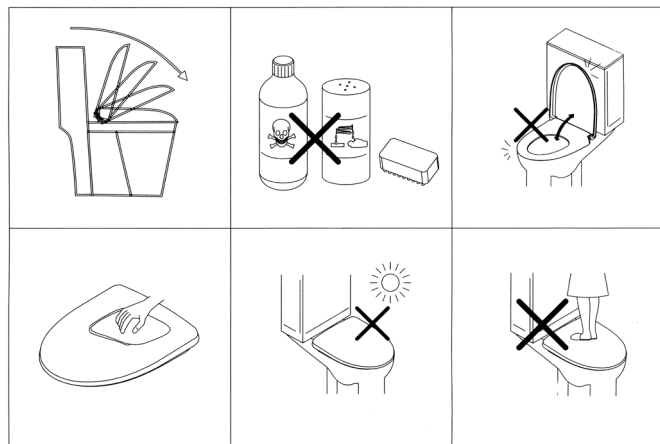


---

## TOILET SEAT INSTALLATION

---


### STEP 1

Insert rubber anchors onto toilet holes.

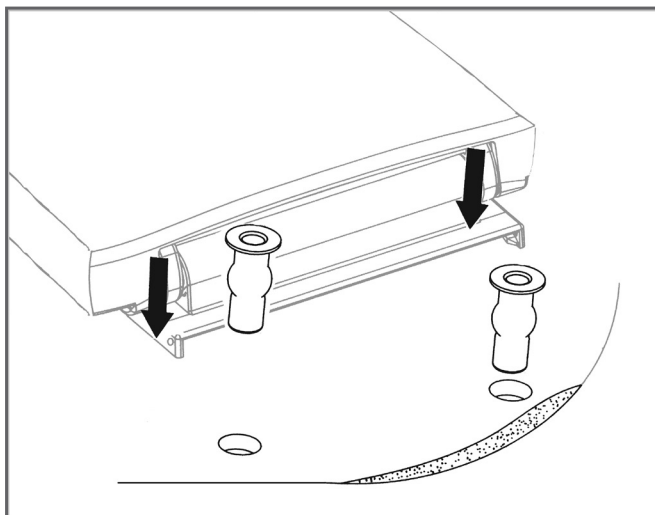


### STEP 2

Place bracket on top.

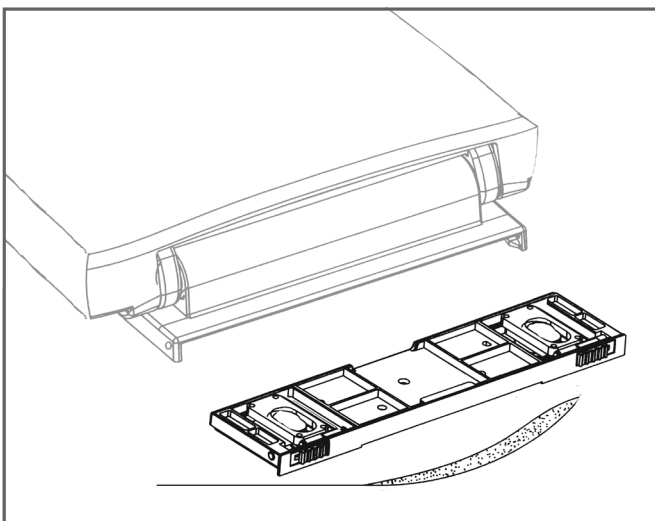


### STEP 3

Align the seat on the toilet bowl with the Adjustment washers.

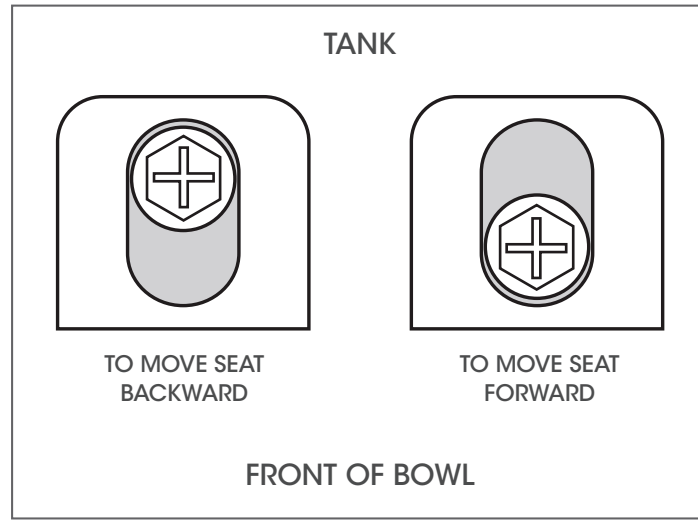


### STEP 4

Screw the bracket into place.

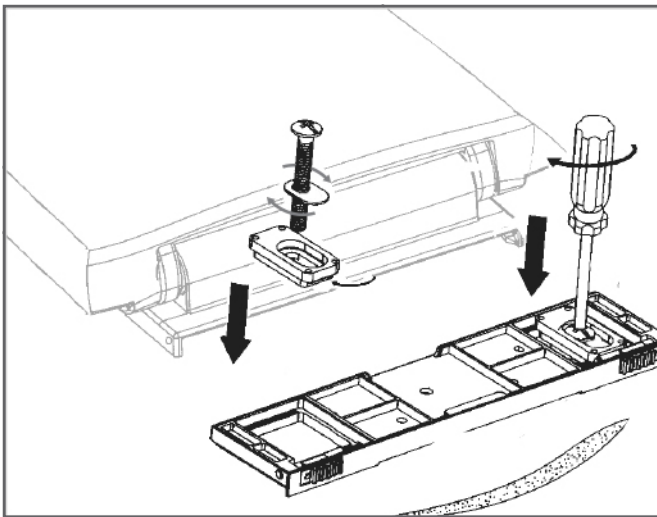


## STEP 5

Slide the toilet seat into bracket.

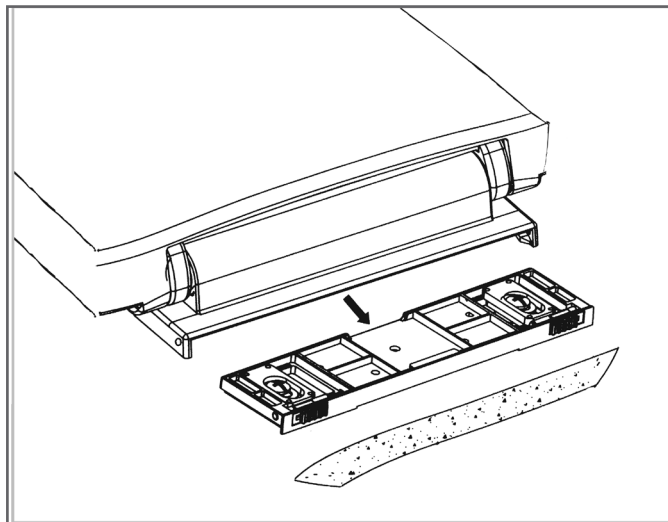

## STEP 5

Lock into place.

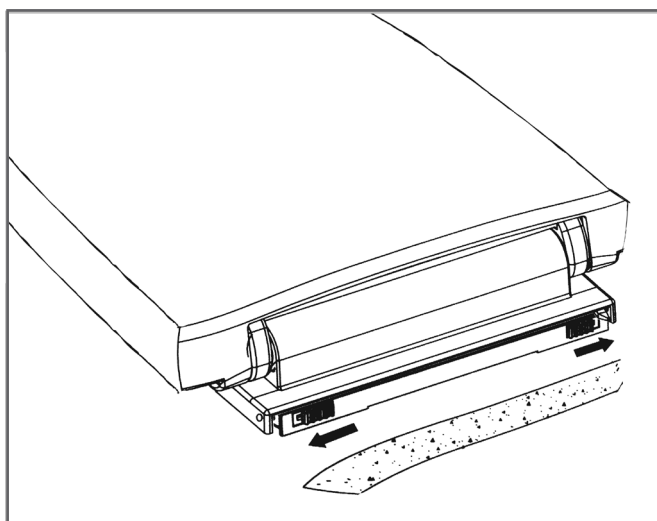

---

## MAINTENANCE

---

### Care and Cleaning

- When cleaning your toilet seat wash it with a mild, soapy water: rinse the seat thoroughly with clear water and dry with a soft cloth.
- Avoid detergents, disinfectants, or cleaning products in aerosol cans.
- Never use abrasive scouring powders on your seat. Some bathroom chemicals and cosmetics may damage the seat's finish.
- After installation, check the tightness of the bolts from time to time to ensure a tight fit.



Congratulations you are now a part of the Valley Acrylic Family, and an owner of the best quality sanitation products in the country.