

# VA0060 DUAL FLUSH TOILET INSTALLATION GUIDE

Thank you for choosing Valley Acrylic Products. This installation manual provides general information on the installation of our products.

All the information in this guide is based upon the most recent product information available at the time of this publication. Valley Acrylic reserves the right to make changes to product characteristics, packaging, or availability at any time without notice.

*Thank you for your purchase!*




Please unpack and inspect all parts carefully to make sure they are complete and not damaged. If any parts are damaged or missing, please contact the authorized dealer you purchased the product through.

## **BEFORE YOU BEGIN**

- Please read these instructions carefully before beginning your installation.
- Consult your local building codes to ensure that your installation complies with local standards.
- Remove the unit from its packaging. Before disposing, packaging and taking unit from your sales person, inspect the unit to make sure it is in good shape.
- Should inspection reveal any damage or defect in the finish, please contact the authorized dealer you purchased the product through. The warranty does not cover damages or defects in the finish once the unit has been installed. Valley's responsibility for shipping damages ceases upon delivery of the product in good order to the carrier. All complaints regarding damage due to transport must be made directly to the carrier.
- Please refer to your product's specification sheet and ensure that both your unit and build plan measure match the stated sizes.


### SPECS

#### FINISHED WALL

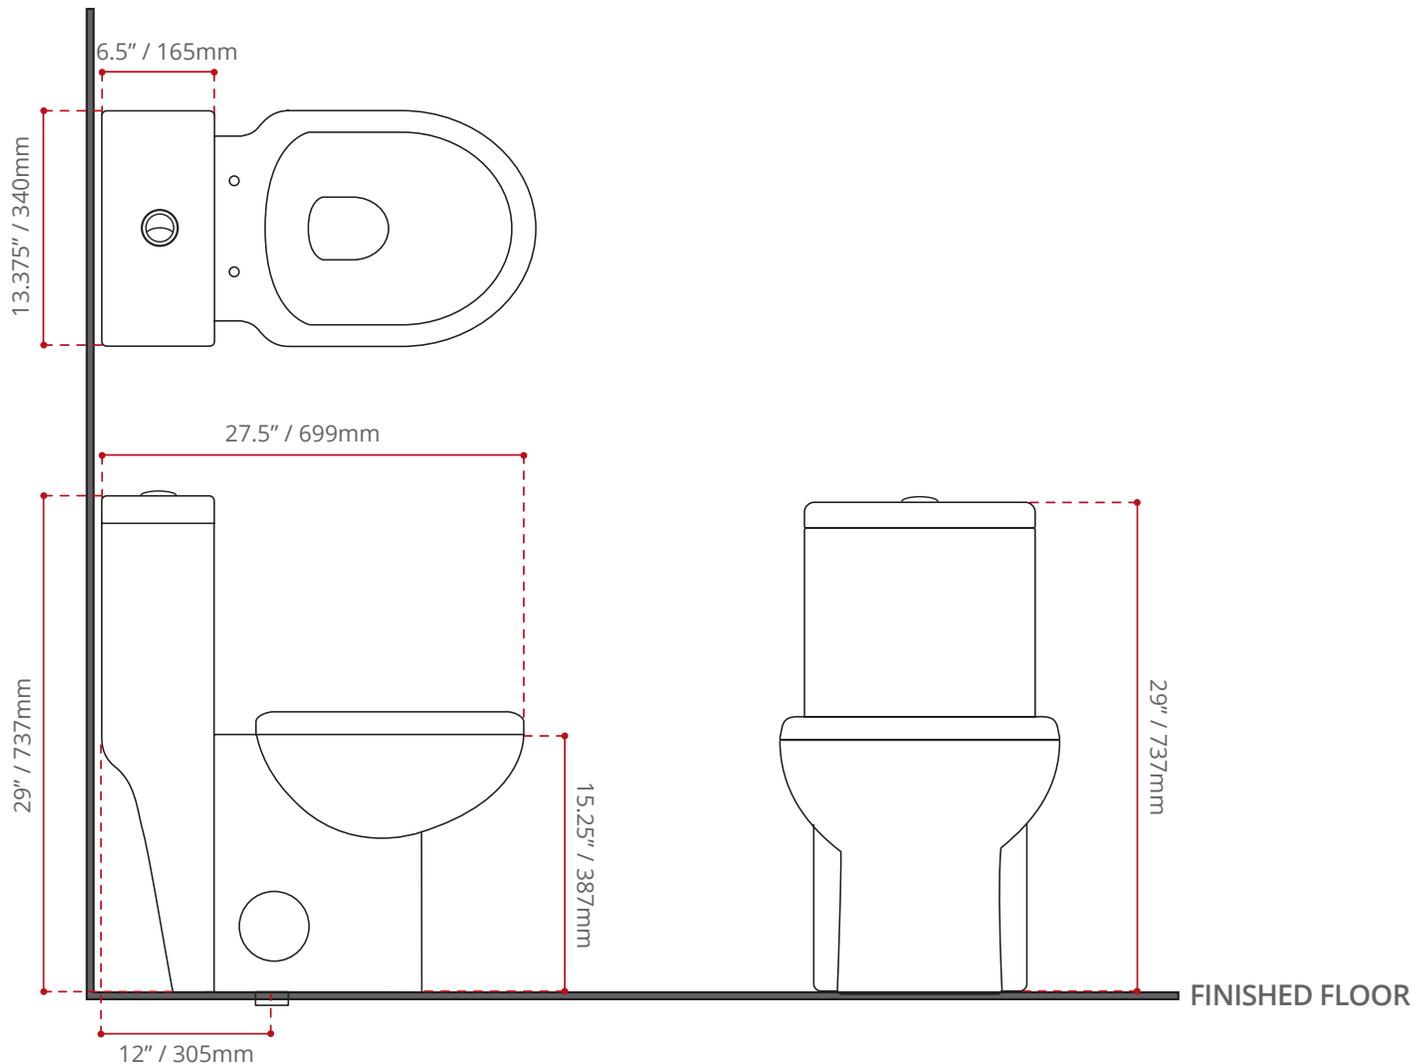


**01**

- Tilt toilet and install outlet seal "K" on exit tube "A"
- Apply 1/8" of caulking (not supplied) to outer edge of Bowl "B"

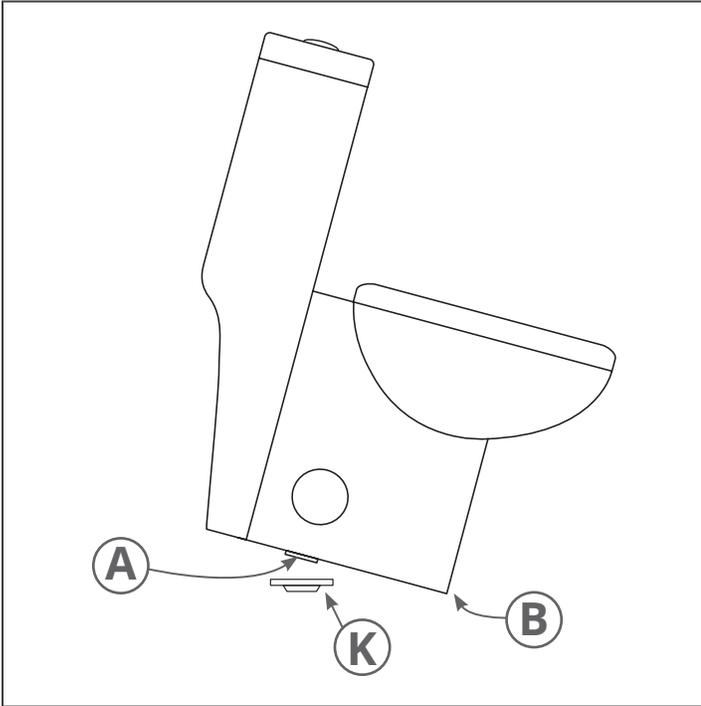


**02**

- Remove side caps
- Place bolt "I" in floor flange "C" and install the toilet.

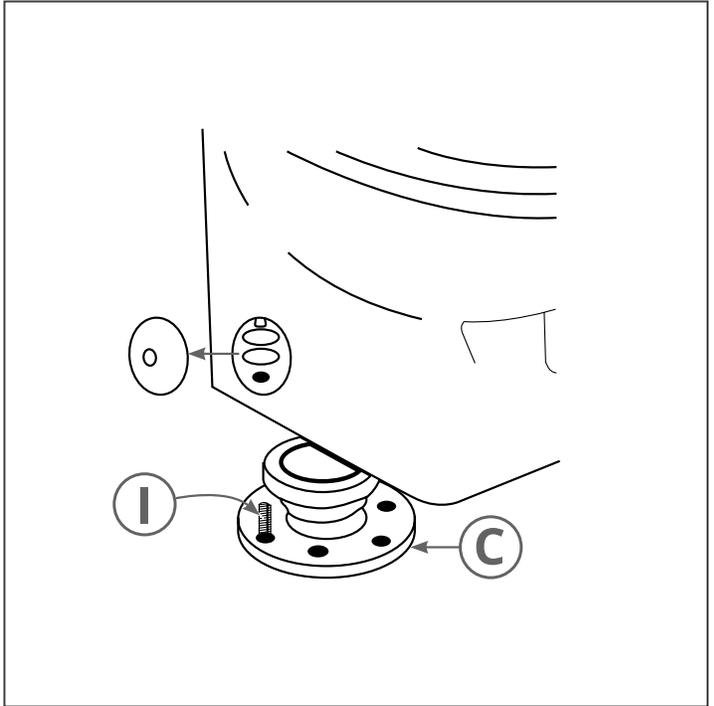


**03**

- Level the toilet, shim as requested.

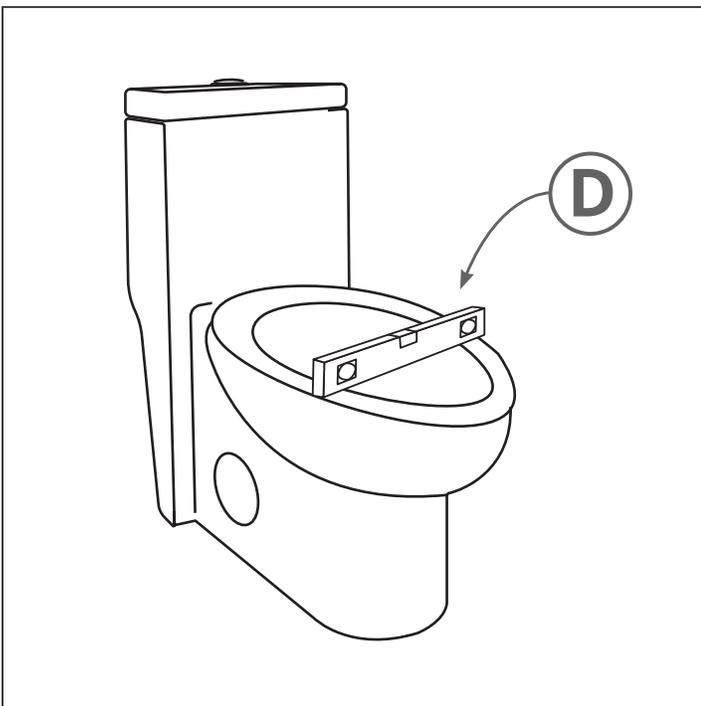


**04**

- Connect supply line "E" (not supplied) and fill tank.
- Check for leaks.
- Install seat.

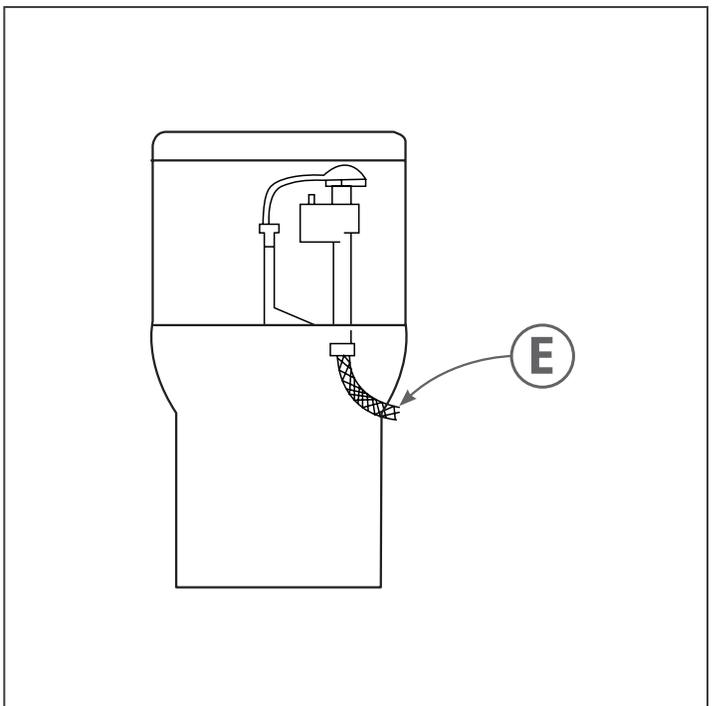

### FLUSH PUSH BUTTONS

- The large flush button should line up over the white actuator on the flush tower in the tank.
- The small flush button should line up over the gray actuator on the flush tower in the tank.
- Pressing both buttons at once will result in a short flush.

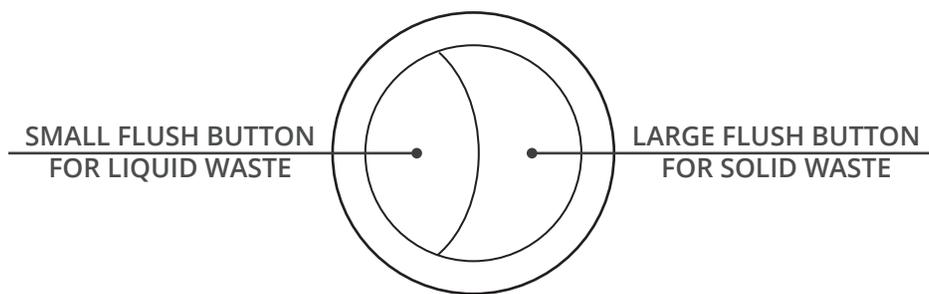

### MAINTENANCE

- Use none abrasive household cleaner and a soft cloth.
- Replacement parts available at any plumbing retailer.

When cleaning your toilet, wash it with mild, soapy water, rinse thoroughly with clear water and dry with a soft cloth. Avoid detergents, disinfectants, or cleaning products in aerosol cans. **NEVER** use abrasive scouring powders or abrasive pads on your toilet seat. Some bathroom chemicals and cosmetics may damage the seat's finish.

**WARNING:** Do not use in-tank cleaners. Products containing chlorine (calcium hypochlorite) can seriously damage fittings in the tank. This damage can cause leakage and property damage.

Valley Acrylic shall not be responsible or liable for any tank fitting damage caused by the use of cleaners containing chlorine (calcium hypochlorite).

### WARRANTY

Valley Acrylic Toilets (not including seats) have a limited warranty for residential use for a period of **1 year** from the original purchase date, against any failure from improper manufacturing defects.



**VALLEY<sup>®</sup>**

*...you dream it, we create it*

***Congratulations you are now a part of the Valley Acrylic Family, and an owner of the best quality sanitation products in the country.***