

---

INSTALLATION GUIDE

VA0076



TOILET SEAT MANUAL

---

## INSTALLATION GUIDE

Thank you for choosing Valley Acrylic Products. This installation manual provides general information on the installation of our products.

### BEFORE YOU BEGIN

- Read all instructions before beginning installation.
- Consult local building codes to make sure the installation complies with standards.
- Remove the unit from its packaging. Before disposing of packaging , inspect the unit to make sure it is in good condition.
- Should inspection reveal any damage or defect in the finish, Contact Valley Acrylic Bath Ltd. at 1-877-398-8827 . The warranty does not cover damages or defects in the finish once the unit has been installed. The manufacturers responsibility for shipping damages ceases upon delivery of the product in good order to the carrier. All complaints regarding damage due to transport must be made directly to the carrier.

### CAUTION

**RISK OF PERSONAL INJURY OR PRODUCT DAMAGE. HANDLE WITH CARE. PRODUCT CAN BREAK, CHIP OR CAUSE INJURY IF HANDLED CARELESSLY. GET HELP LIFTING THE LAVATORY.**

**WE RECOMMEND THE INSTALLATION OF THIS PRODUCT BE DONE BY A LICENSED PROFESSIONAL PLUMBER.**

## INSTALLATION GUIDE

### REQUIRED TOOLS



Teflon Tape




Tape Measure



Phillips screwdriver


### PARTS

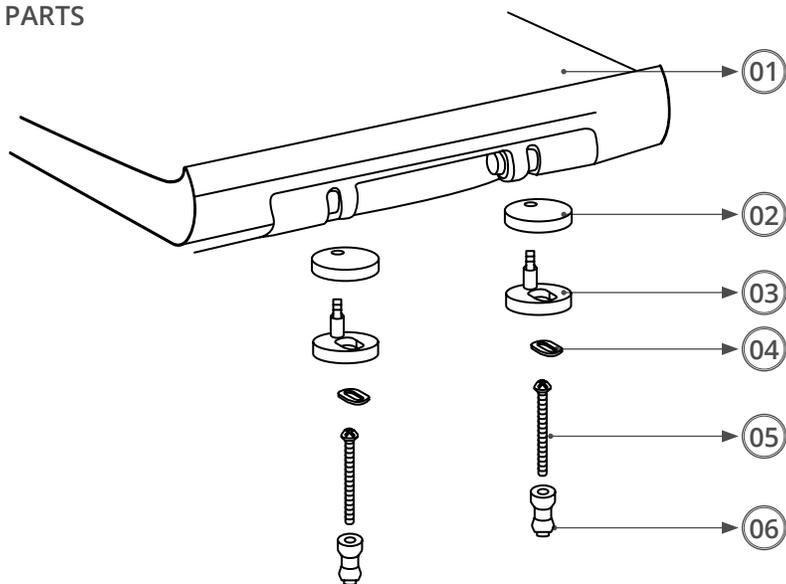

- 01 - Toilet seat
- 02 - Beauty hinge cover caps
- 03 - Hinge
- 04 - Adjustment plate
- 05 - Screw
- 06 - Expanding plug


## INSTALLATION GUIDE

01

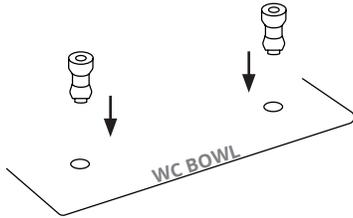


Place the expanding plugs into seat fixing holes.

02




Fit the adjustment plate into the hinge, then place the screw through this assembly.

03

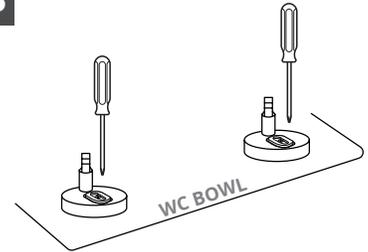


Bolt adjustment plate to the hinge, do not fully tighten - it should still be adjustable.

04

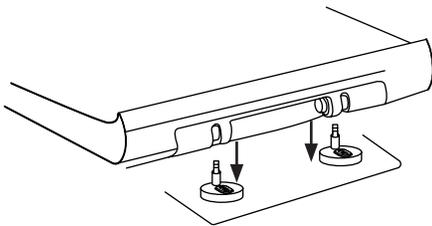


Locate seat hinge over pins and press down until seat "clicks" into place

05




Align Seat

06

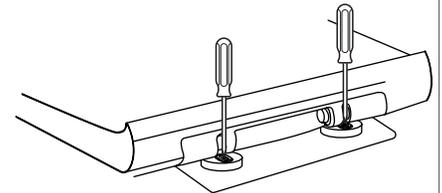


After desire adjustment. Close the seat and lid, then tighten bolts.

07

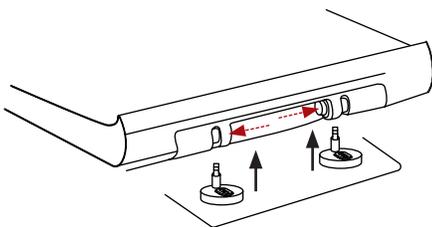


Separate and remove seat from pan. To remove the seat, push both buttons on the seat and lift upwards.

08

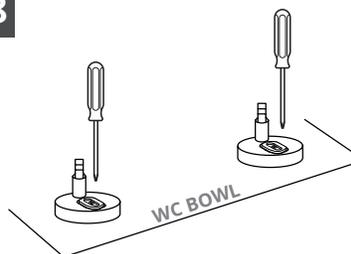


Ensure bolts are fully tightened

09

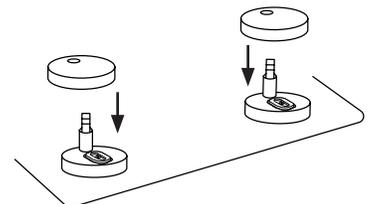

Place beauty hinge cover caps onto hinge plates.

## INSTALLATION GUIDE

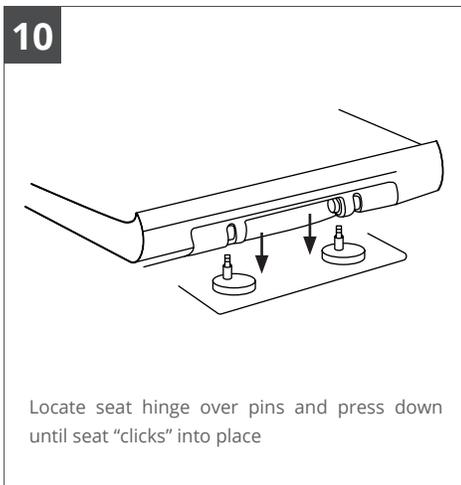

## MAINTENANCE

