

VA-6402.100 & VA6402.500INSTALLATION GUIDE



Thank you for choosing Valley Acrylic Products. This installation manual provides general information on the installation of our products.

BEFORE YOU BEGIN

- Read all instructions before beginning installation.
- Consult local building codes to make sure the installation complies with standards.
- Remove the unit from its packaging. Before disposing of packaging, inspect the unit to make sure it is in good condition.
- If the heating wire inside the unit fails or becomes damaged, turn the unit OFF. **DO NOT** attempt to repair or remove the power switch or heating wire. Should inspection reveal any damage or defect in the finish, Contact Valley Acrylic Bath Ltd. at 1-877-398-8827. The warranty does not cover damages or defects in the finish once the unit has been installed. The manufacturers responsibility for shipping damages ceases upon delivery of the product in good order to the carrier. All complaints regarding damage due to transport must be made directly to the carrier.
- We recommend mounting the left vertical rail mounts to a stud.

This product is not intended for commercial use. Residential use only. Do not put the unit into water. This product is for indoor use only.




CAUTION

RISK OF PERSONAL INJURY OR PRODUCT DAMAGE. HANDLE WITH CARE. PRODUCT CAN BREAK, CHIP OR CAUSE INJURY IF HANDLED CARELESSLY.


WE RECOMMEND THE INSTALLATION OF THIS PRODUCT BE DONE BY A LICENSED PROFESSIONAL PLUMBER.


ELECTRICAL INFORMATION:

SUPPLY: 120V 60HZPOWER: 150W

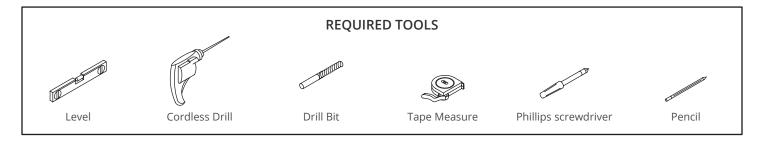



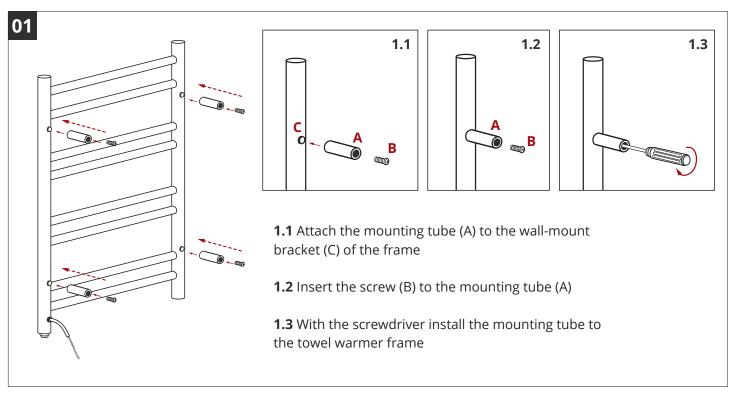


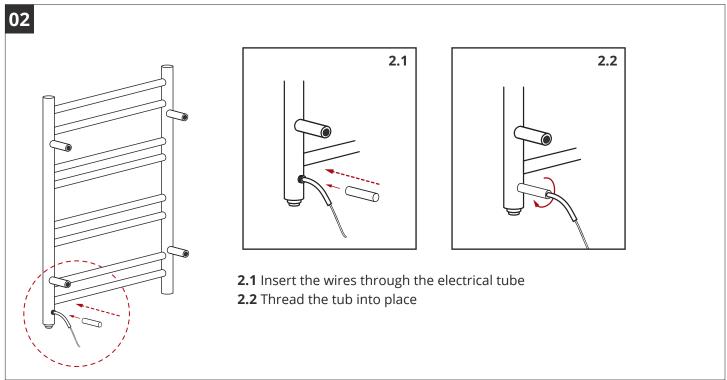











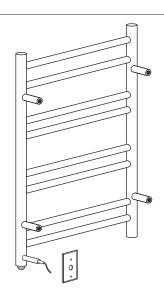

3.2 Get the plate facing at the same direction of the towel warmer.

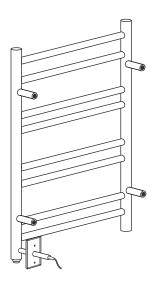


3.3 Place the plate into place




The electrical wiring should be left to an electritian according to your local code.




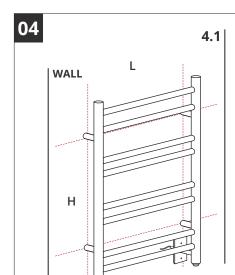

4.1 Place the towel warmer to the wall. We suggest mounting the Towel Warmer at least 24" (600mm) above the floor.

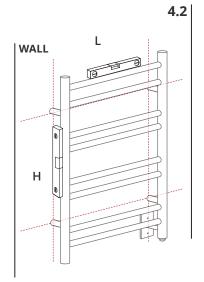



4.2 Make sure the towel warmer is level

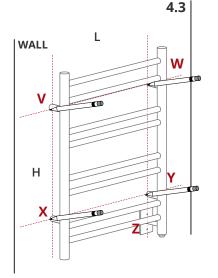


4.3 Use a pencil to draw locations V, W, X, Y and Z over a stud




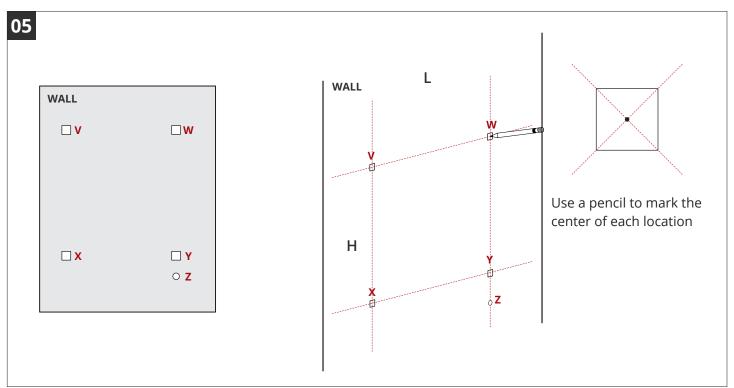

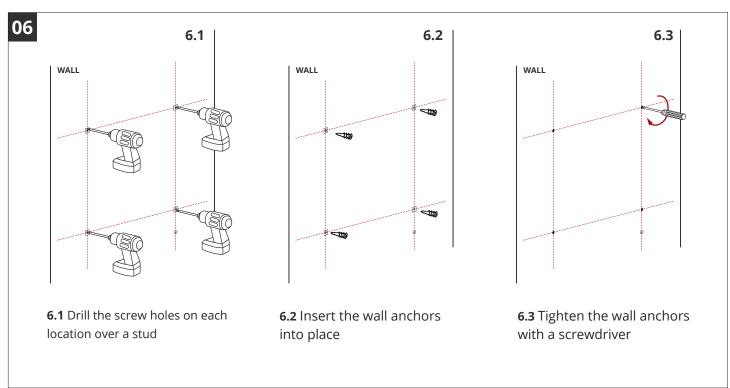





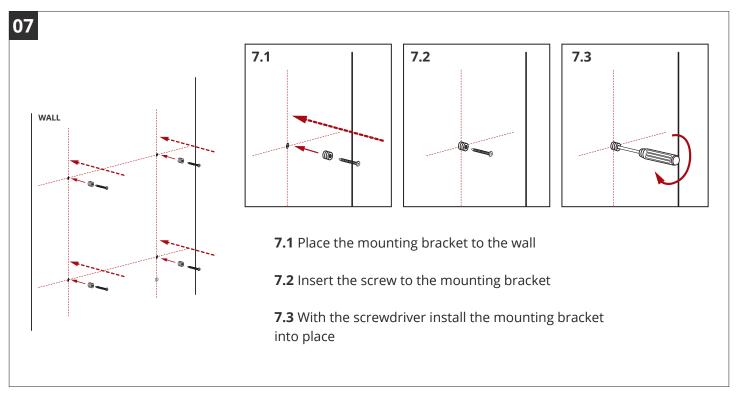

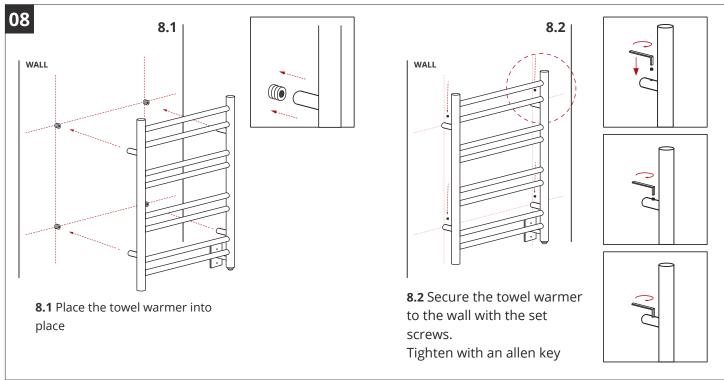



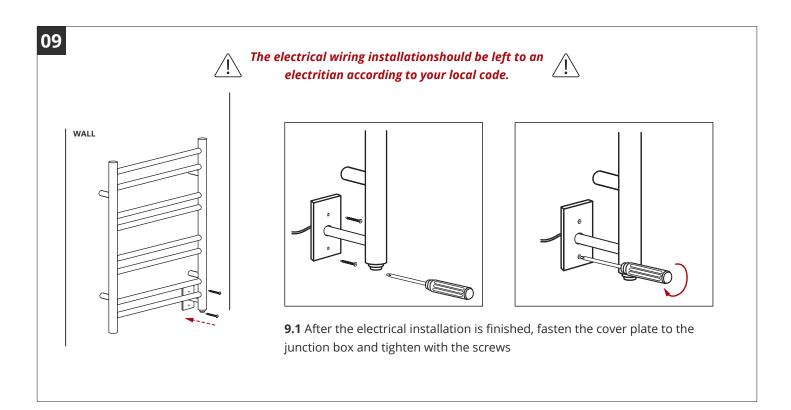

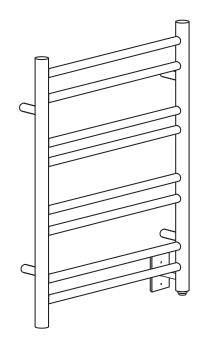

OPERATION

After installation is complete, connect the electric power and turn on the power switch, located on the bottom left of the unit. The unit will begin to heat. If the unit will not be used for an extended time, simply turn the unit off using the power switch

Turn off the switch when the towel warmer is not in use. The indicator light will turn dark and the towel warmer will stop working

CLEANING INFORMATION

While the towel warmer is warm, clean with a soft, non-abrasive, damp cloth. Once the towel warmer has cooled, lightly polish with a soft, dry cloth.

DO NOT use abrasive cleaning powders, metal polish or chlorine-based cleaners on any part of the towel warmer.





OVERLAPPING TOWELS MAY INCREASE TOWEL WARMER TEMPERATURES

• PROPERLY HANG TOWELS • DO NOT OVERLAP TOWELS





- Towel warmers are designed to warm towels only and should not be used for any other purpose.
- Never stand, sit on or hang on the towel warmer.
- Never allow children to play on or with the towel warmer.
- Make sure that the circuit breaker is shut off at the main electrical panel before wiring or servicing your towel warmer.
- The towel warmer must be properly grounded.
- All wiring must be done in accordance with the National Electrical Code (NEC) and Canadian Electrical Code (CEC) and should be performed by a licensed professional who is certified to do electrical wiring.
- Never place your towel warmer inside a shower, sauna or steam room.
- Never attempt to warm more than two (2) towels on the towel warmer at a time. Overloading the towel warmer will cause the unit to become extremely hot and may result in a burn if touched.



Congratulations you are now a part of the Valley Acrylic Family,