


771.112.100

## **INSTALLATION GUIDE**







# 771.112.100

### **INSTALLATION GUIDE**

Remove the unit from its packaging. Before disposing of packaging and taking unit from your salesperson, inspect the unit.

Should inspection reveal any damage or defects in the finish, contact your salesperson. The warranty does not cover damages or defects in the finish once the unit has been installed.

It is recommended that you place the unit in the bathroom before you start. Sectional units should be disassembled if necessary. Conserve all nuts and bolts.

Don't over bend the hose, ensure no hose deformation before or after installation.

**CAUTION:** FOR BEST RESULTS, WE STRONGLY RECOMMEND THE INSTALLATION OF THIS FAUCET BE DONE BY A LICENSED PLUMBER.

#### CARE AND MAINTENANCE







- · Avoid polishing powder, cleaning powder and any kind of detergent.
- To clean your Valley Acrylic faucet, wash with a soapy nonabrasive cloth. Wipe dry with a soft towel or cloth. We recommend this be done on a regular basis.

#### **AEREATOR MAINTENANCE**

Clean the aereator gently with a toothbrush.









# 771.112.100

IDE SPREAD LAVATORY FALICET



Before assembly, flush the water supply pipes thoroughly to drain debris inside (allow the water to run with the main stopcock open for 3min), otherwise dirty particles might affect the function of the faucet.






#### SHUT OFF WATER SUPPLIES

#### **SPOUT INSTALLATION**

Place spout body (1), spout escutcheon (2), o-ring, (3) onto countertop.

Install nylon hoses (7) , gasket (5) and washer (4).

Hand tighten spout (1) with fixing nuts (6).



02


#### HANDLE INSTALLATION


Disassemble the handle assembly as shown.

Remove set screw (9), handle (8).

Remove top portion as shown.

Place bottom handle assembly through counter and replace top assembly.



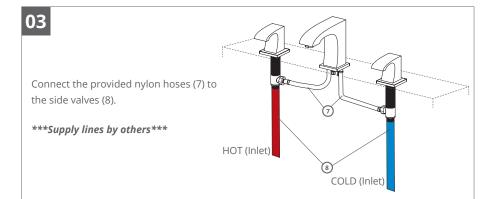



771.112.100
WIDE SPREAD LAVATORY FAUCET



Congratulations! You are now a part of the Valley Acrylic family.